

VBA1000-30

80 - 1000MHz 30W Amplifier

- Rugged push-pull MOSFET technology
- Class A for maximum mismatch drive
- General linear power requirements


The **VBA1000-30** is a member of our family of 80-1000MHz high power amplifiers, designed primarily for EMC applications.

The design is based on push-pull LDMOS technology in the output stage, coupled with GaAs technology in the driver stages



The amplifier operates in class A, the benefits for EMC applications being very low distortion and tolerance of 100% mismatch. Fold-back protection is neither fitted nor needed! This makes it supremely suited for very demanding transducer and test chamber requirements.

Performance Chart

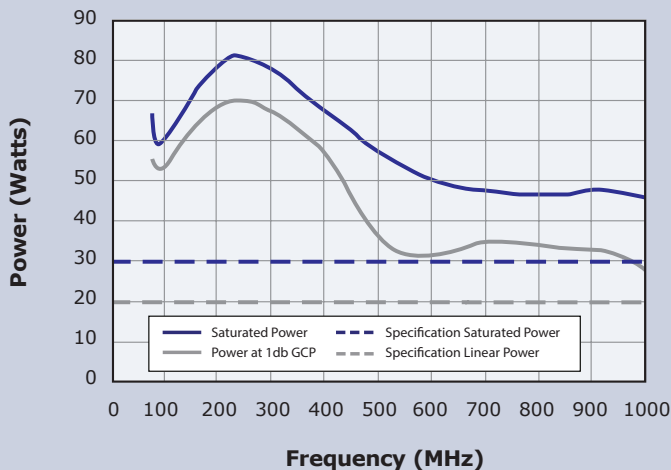

Choose **GaAs Class A** for the ultimate in linearity, ruggedness, efficiency and cost - only from Vectawave.

See overleaf for technical specification

Electrical

Frequency Range (Instantaneous)	80-1000MHz
Rated Output Power	30W Min (40W typical)
Output Power at 1dB Gain Compression	20W Min (25W typical)
Gain	50dB Min
Third Order Intercept Point (see note 1)	57dBm
Gain variation with Frequency	±3dB
Harmonics at Minimum Linear Power	Better than -20dBc
Output Impedance	50 Ohms
Stability	Unconditional
Output VSWR Tolerance (see note 2)	Infinity:1
Input VSWR	2:1 (Max)
Supply Voltage	85-264V ac
Supply Frequency Range	47-63Hz
Supply Power	300VA (Max)
Mains Connector	IEC320

Mechanical

RF Connector Style	Type N Female
Safety Interlock	2 x BNC, S/C and O/C to Mute
USB/GPIB Interface	Optional
Dimensions	19 inch, 3U Case, 440mm Deep
Mass	13kg
Operating Temperature Range	0-40°C
Case Style Options	Rack mount with Front or Rear panel connectors Bench mount with Front panel connectors

Regulatory Compliance

Conducted and Radiated Emissions	EN61326 Class A
Conducted and Radiated Immunity	EN61326:1997 Table 1
Safety	EN61010-1

Notes

- 1 The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.
- 2 Output VSWR tolerance is specified for excitation within the permitted levels and frequency range

**Represented Worldwide**

Vectawave Technology Ltd.
Unit D, The Apex,
St Cross Business Park, Monks Brook,
Newport, Isle of Wight, PO30 5XW

Tel: +44 (0) 1983 821 818

E-mail: sales@vectawave.co.uk